

# 6LTAA9.5-G3

> Specification sheet



Our energy working for you.™

## Description

Cummins 6LTAA9.5G engines are mechanical fuel system to deliver heavy-duty performance. Electronic governor controls to keep engine speed more stable. 24-valve and bigger flow injector design for one of the highest power-to-weight ratio in its class.

At the same time, the 6LTAA9.5-G engine delivers better fuel economy and less smoke emission.



This engine has been built to comply with CE certification.



This engine has been designed in facilities certified to ISO9001 and manufactured in facilities certified to ISO9001 or ISO9002.

## Features

**Fuel System** - Bosch P7100 type mechanical fuel injection pump have high injection pressure - optimize engine performance and establish an unrivalled reputation for reliability.

**Electronic Governor Control Unit** - Strengthening electronic governor control unit can optimize engine speed stability and reliability.

**Holset HE400 and HE500 Non Wastegate Turbocharger** - Increased power, fuel economy, and lower smoke and noise levels.

**Electronic Fuel Shot Off Valve** - Increased safety for mechanical fuel system engine.

**Integrated Block Design** - Integrated fluid circuits replace hoses and eliminate potential leaks.

**24-Valve Cylinder Head** – Four valves per cylinder for increased power with faster response and fuel economy.

**Coolpac Integrated Design** - Products are supplied complete with cooling package and air cleaner kit for a complete power package. Each component has been specifically developed and rigorously tested for G-Drive products, ensuring high performance, durability and reliability.

**Service and Support** - G-Drive products are backed by an uncompromising level of technical support and after sales service, delivered through a world class service network.

## 1500 rpm (50 Hz Ratings)

Gross Engine Output			Net Engine Output			Typical Generator Set Output					
Standby	Prime	Base	Standby	Prime	Base	Standby (ESP)		Prime (PRP)		Base (COP)	
kWm/BHP			kWm/BHP			kWe	kVA	kWe	kVA	kWe	kVA
280/375	250/335	200/268	262/351	235/315	185/248	240	300	217	272	171	214

## 1800 rpm (60 Hz Ratings)

Gross Engine Output			Net Engine Output			Typical Generator Set Output					
Standby	Prime	Base	Standby	Prime	Base	Standby (ESP)		Prime (PRP)		Base (COP)	
kWm/BHP			kWm/BHP			kWe	kVA	kWe	kVA	kWe	kVA
290/289	265/355	212/284	272/365	250/335	197/264	250	313	227	284	182	228

Our energy working for you.™

[www.cumminsgdrive.com](http://www.cumminsgdrive.com)

©2009 | Cummins G-Drive Engines | Specifications Subject to Change Without Notice | Cummins is a registered trademark of Cummins Inc. (09/17) (GDSSxxx)



## General Engine Data

Type	4 cycle, in-line, Turbo Charged, Air-cooled
Bore mm	116 mm (4.58in.)
Stroke mm	148 mm (5.82in.)
Displacement Litre	9.5 litre (579 in. <sup>3</sup> )
Cylinder Block	Cast iron, 6 cylinder
Battery Charging Alternator	70 amps
Starting Voltage	24 volt, negative ground
Fuel System	Bosch Direct injection
Fuel Filter	Spin-on fuel filters with water separator
Lube Oil Filter Type(s)	Spin-on full flow filter
Lube Oil Capacity (l)	28.1
Flywheel Dimensions	SAE1


## Coolpac Performance Data

Cooling System Design	Air-Air Charge Cooled
Coolant Ratio	50% ethylene glycol; 50% water
Coolant Capacity (l)	55.5
Limiting Ambient Temp.** (°C)	50 (50Hz); 55 (60Hz)
Fan Power (kWm)	13 (50Hz); 15 (60Hz)
Cooling System Air Flow (m <sup>3</sup> /s)**	7.9 (50Hz); 10 (60Hz)
Air Cleaner Type	Light duty dry replaceable element with restriction indicator

\*\* @ 13 mm H<sub>2</sub>O

## Weight & Dimensions

Length	Width	Height	Weight (dry)
mm	mm	mm	kg
2110	1102	1489	945

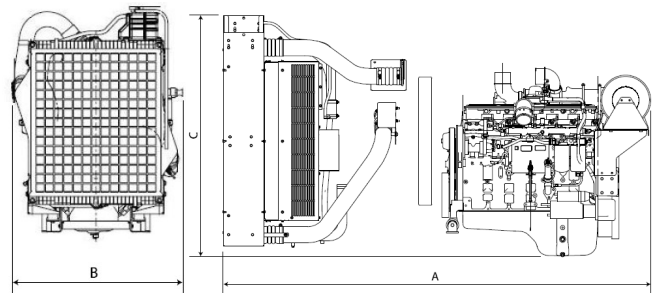

## Fuel Consumption 1500 (50 Hz)

%	kWm	BHP	L/ph	g / kWh
<b>Standby Power</b>				
100	280	375	66	194
<b>Prime Power</b>				
100	250	335	58	193
75	188	251	44	193
50	125	168	30	195
25	63	84	16	206
<b>Continuous Power</b>				
100	200	268	47	192

## Fuel Consumption 1800 (60 Hz)

%	kWm	BHP	L/ph	g / kWh
<b>Standby Power</b>				
100	290	389	72	206
<b>Prime Power</b>				
100	265	355	65	202
75	199	266	47	196
50	133	178	33	203
25	66	89	18	225
<b>Continuous Power</b>				
100	212	284	56	198

## Ratings Definitions

### Emergency Standby Power (ESP):

Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

### Limited-Time Running Power (LTP):

Applicable for supplying power to a constant electrical load for limited hours. Limited-Time Running Power (LTP) is in accordance with ISO 8528.

### Prime Power (PRP):

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

### Base Load (Continuous) Power (COP):

Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN6271 and BS 5514.

Our energy working for you.™

[www.cumminsgdrive.com](http://www.cumminsgdrive.com)

©2009 | Cummins G-Drive Engines | Specifications Subject to Change Without Notice | Cummins is a registered trademark of Cummins Inc. (09/17) (GDSSxxx)

